

Vertical Clearance Restrictions - Kansas Highways KDOT District Two




Note: For most locations, only the **minimum** low clearance value is shown between interchanges on Interstate highways.

Note: The **lowest** vertical clearance is provided between Interstate interchanges.

Travelers should use their best judgment when crossing under structures and should follow posted traffic control, including low clearance signs. Travelers are advised that not all structures are posted with low clearance signs. KDOT makes no warranties, guarantees, or representations for accuracy of this information and assumes no liability for errors or omissions.

Map Date: 04/03/2013

Kansas Department of Transportation
Bureau Of Design, Bridge Evaluation
(785) 296-4434
Topeka, KS

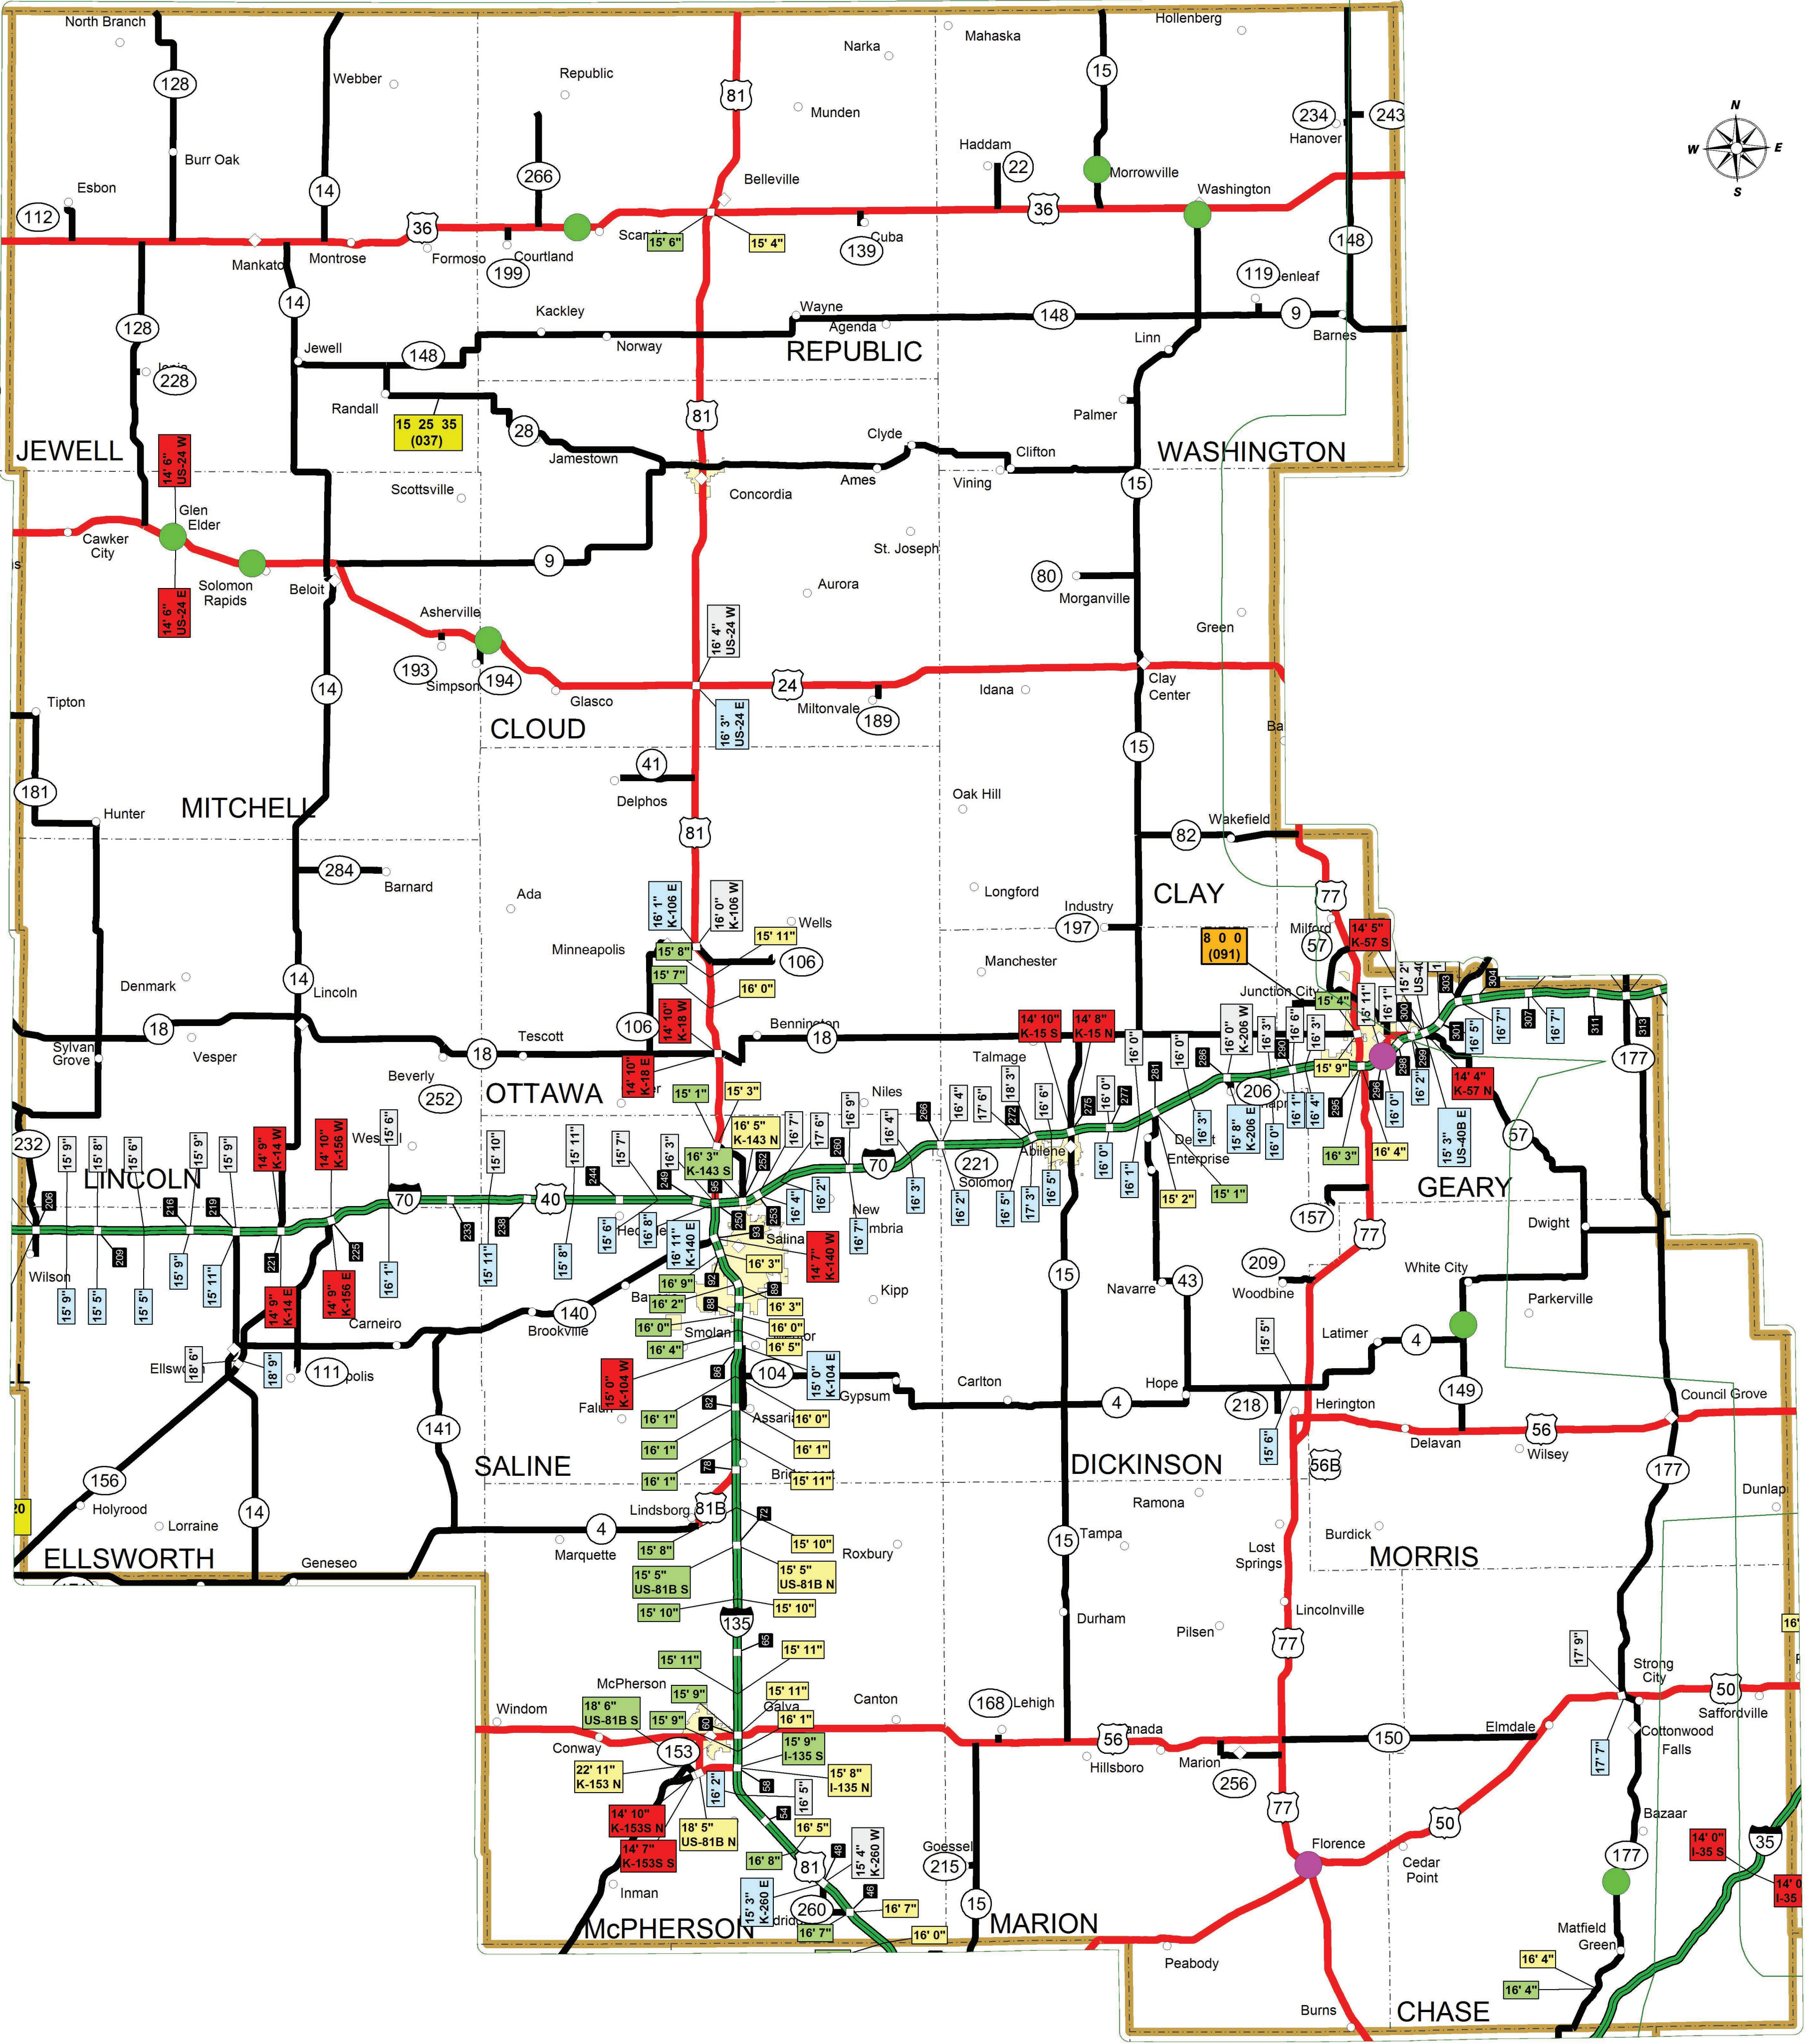

Legend

- 16' 2" Northbound Restriction
- 16' 2" Southbound Restriction
- 16' 2" Eastbound Restriction
- 16' 2" Westbound Restriction
- 14' 10" Restriction of 15 Feet or Less
- 120,000 Pound Restricted Bridge
- Roundabout
- 25 30 40 (011) Posted Bridge
- 25 30 40 (013) Posted Bridge - Non-State Route

WEIGHT LIMIT	AT	BT	CT	WEIGHT LIMIT	A	B	C	TONS
25	30	40		25	30	40		0.11
25	30	40		25	30	40		0.13