
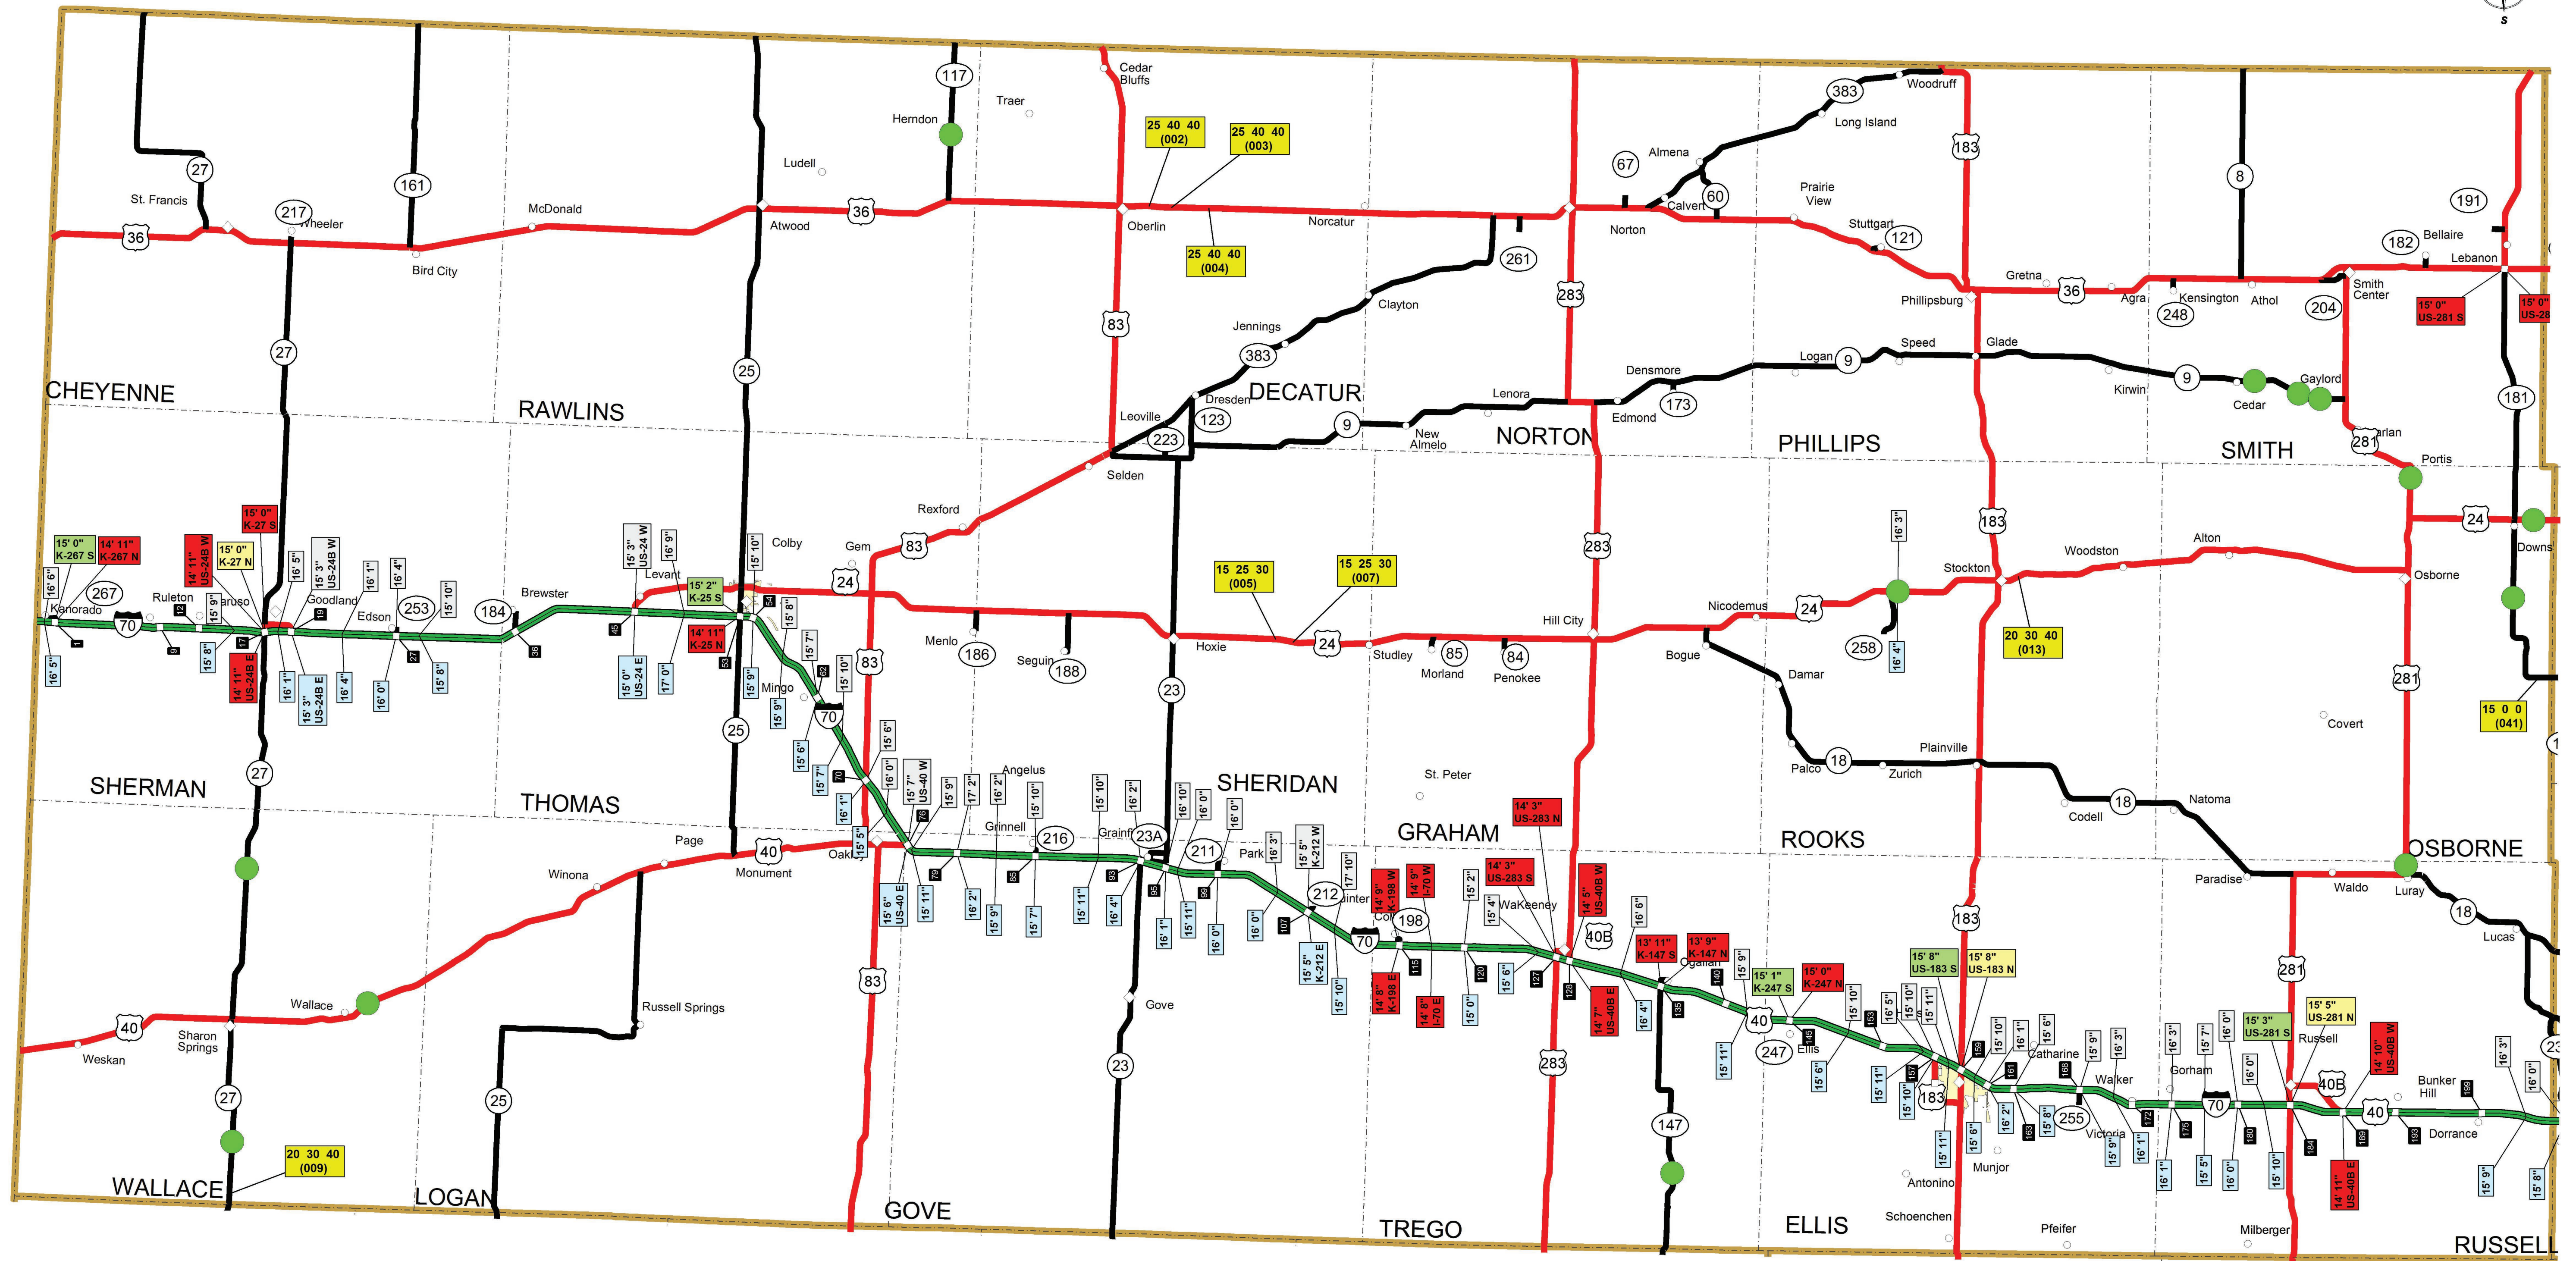


# Vertical Clearance Restrictions - Kansas Highways KDOT District Three

Note: For most locations, only the **minimum** low clearance value is shown between interchanges on Interstate highways.

Note: The lowest vertical clearance is provided between Interstate interchanges.



- Legend**
- 16' 2" Northbound Restriction
  - 16' 2" Southbound Restriction
  - 16' 2" Eastbound Restriction
  - 16' 2" Westbound Restriction
  - 14' 10" Restriction of 15 Feet or Less
  - 120,000 Pound Restricted Bridge
  - Roundabout
  - 25 30 40 (013) Posted Bridge
  - 25 30 40 (013) Posted Bridge - Non-State Route

Travelers should use their best judgment when crossing under structures and should follow posted traffic control, including low clearance signs. Travelers are advised that not all structures are posted with low clearance signs. KDOT makes no warranties, guarantees, or representations for accuracy of this information and assumes no liability for errors or omissions.

Map Date: 04/03/2013

Kansas Department of Transportation  
Bureau Of Design, Bridge Evaluation  
(785) 296-4434  
Topeka, KS

