



Vertical Clearance Restrictions - Kansas Highways KDOT District Six

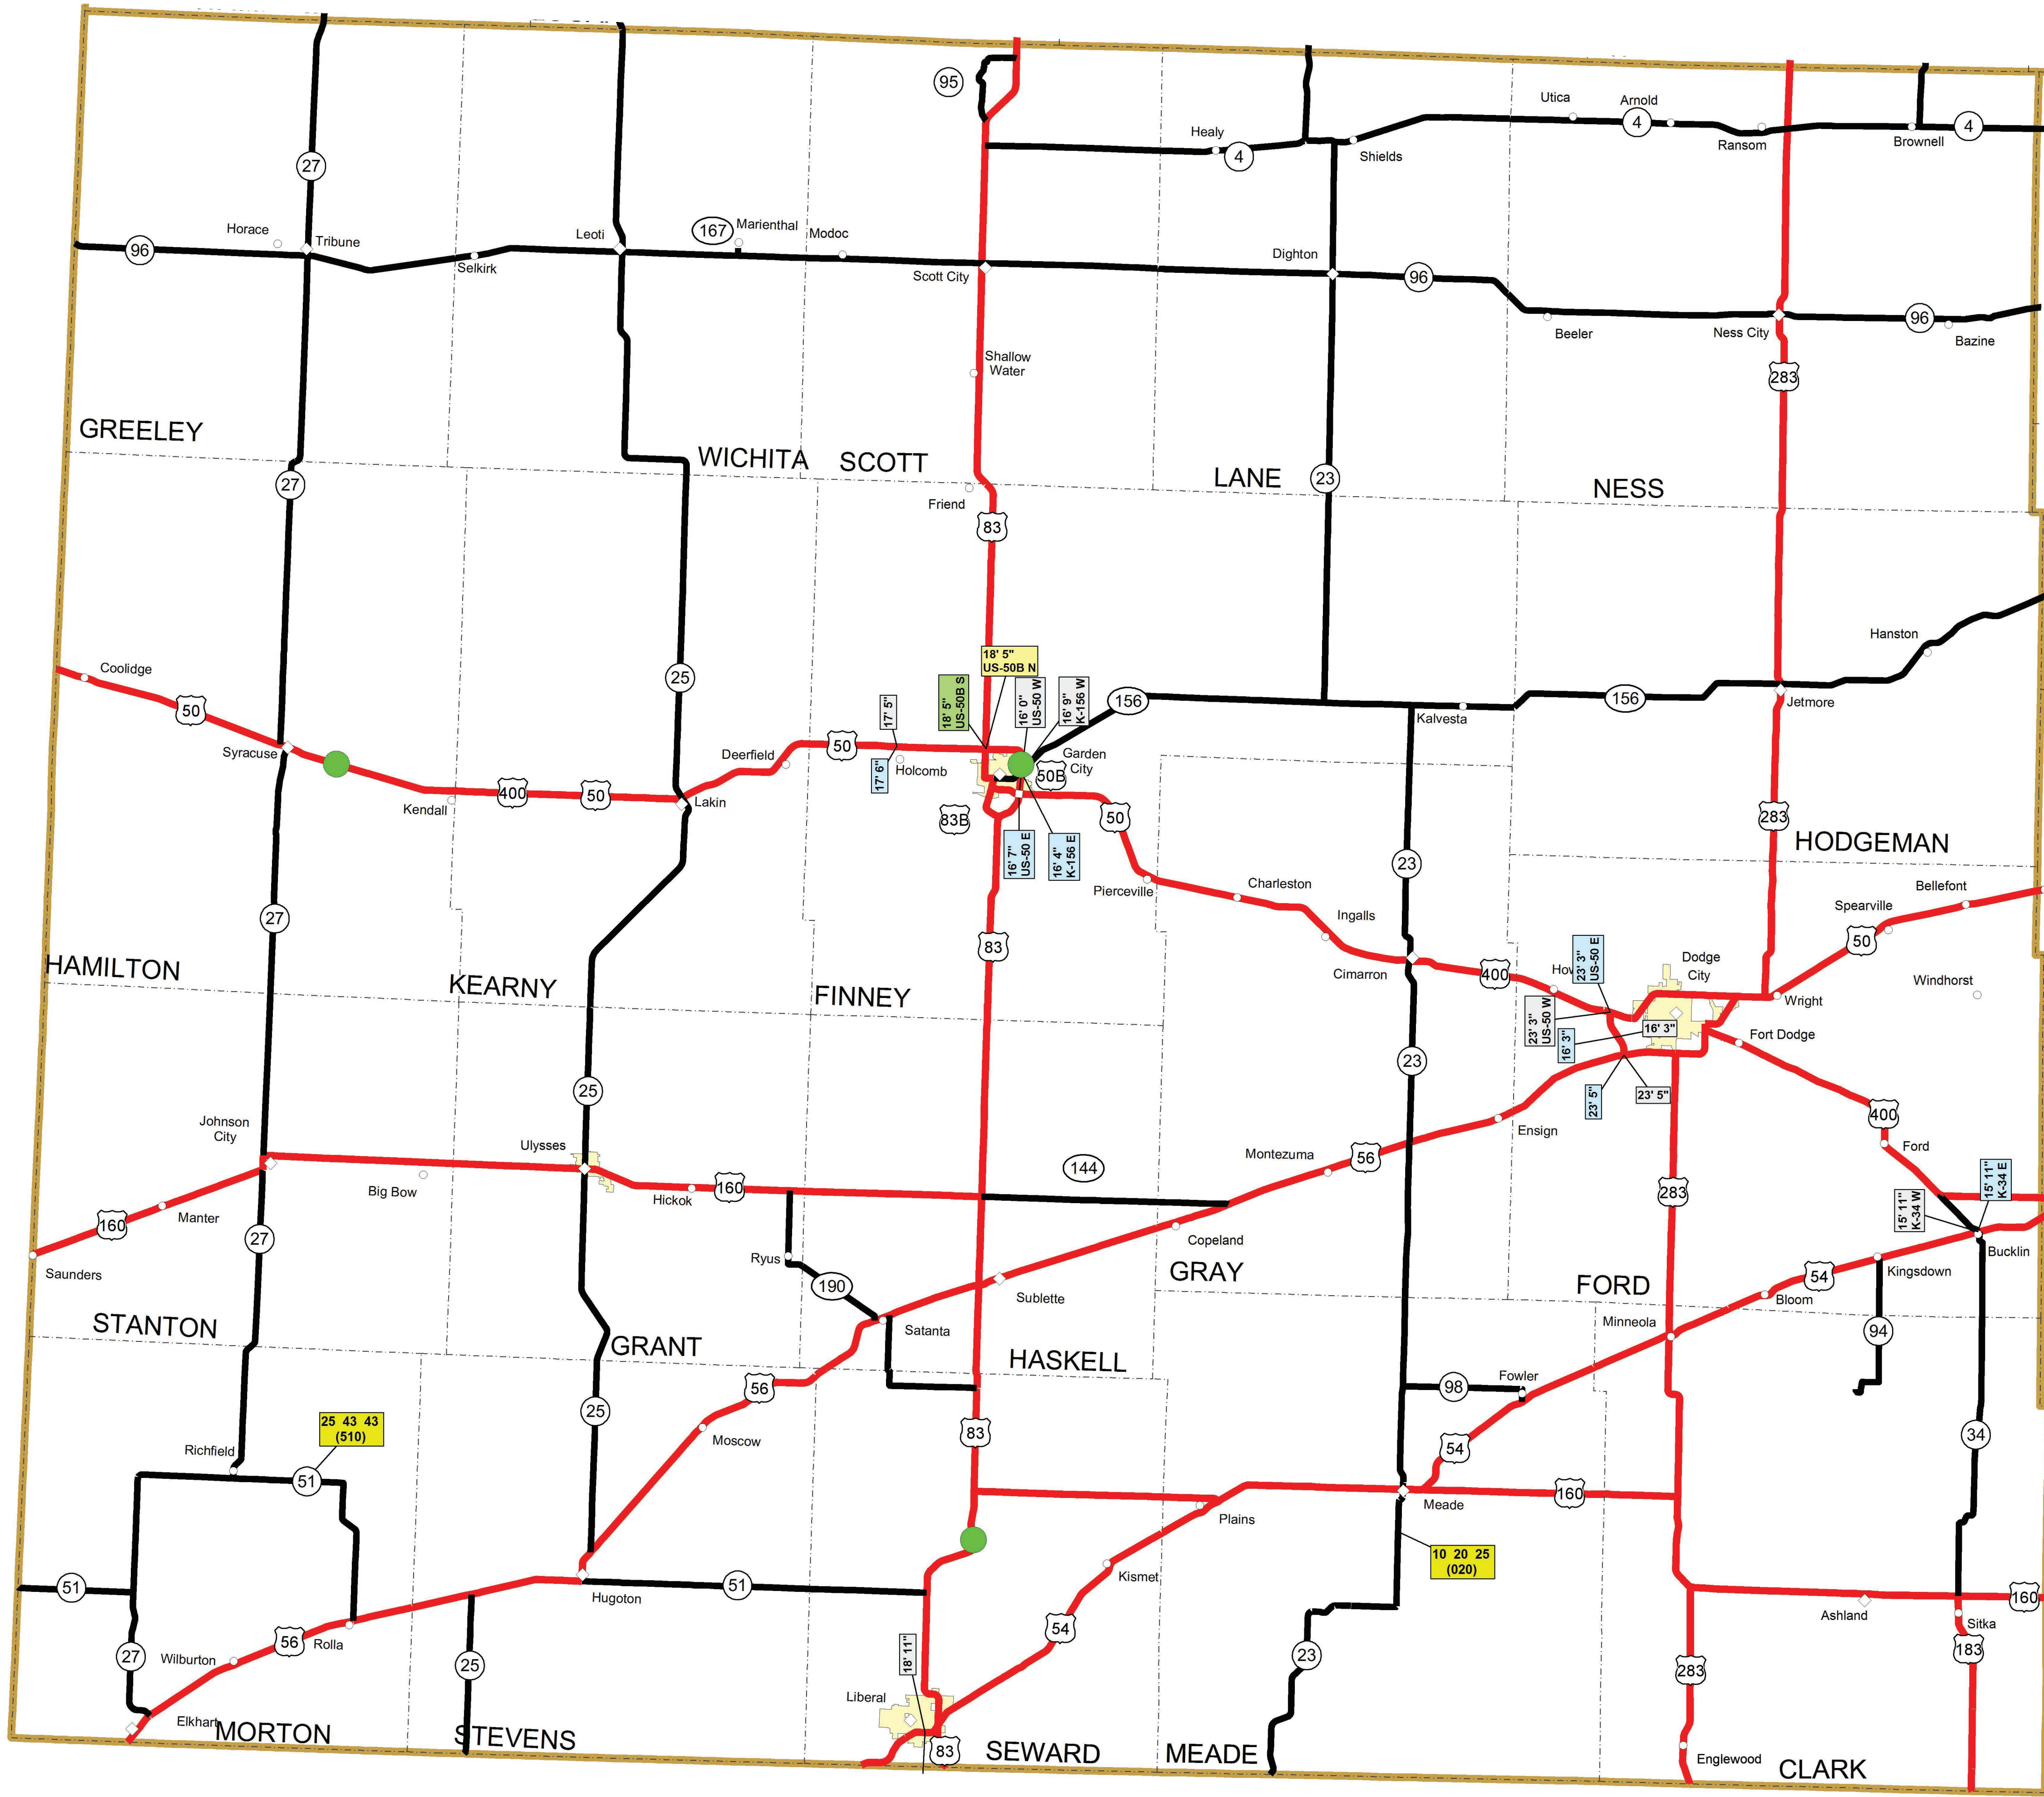


Note: For most locations, only the **minimum** low clearance value is shown between interchanges on Interstate highways.

Note: The **lowest** vertical clearance is provided between Interstate interchanges.



Travelers should use their best judgment when crossing under structures and should follow posted traffic control, including low clearance signs. Travelers are advised that not all structures are posted with low clearance signs. KDOT makes no warranties, guarantees, or representations for accuracy of this information and assumes no liability for errors or omissions.

Map Date: 04/03/2013
 Kansas Department of Transportation
 Bureau Of Design, Bridge Evaluation
 (785) 296-4434
 Topeka, KS



Legend

- 16' 2" Northbound Restriction
- 16' 2" Southbound Restriction
- 16' 2" Eastbound Restriction
- 16' 2" Westbound Restriction
- 14' 10" Restriction of 15 Feet or Less
- 120,000 Pound Restricted Bridge
- Roundabout
- 25 30 40
(011) Posted Bridge
- 25 30 40
(013) Posted Bridge - Non-State Route

| WEIGHT LIMIT | A | B | C | D | E | F | G | H | I | J | K | L | M | N | O | P | Q | R | S | T | U | V | W | X | Y | Z | | | | | | | | | | | | | | | | | | | | | | | |
|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| WEIGHT LIMIT | 10 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 65 | 70 | 75 | 80 | 85 | 90 | 95 | 100 | 105 | 110 | 115 | 120 | 125 | 130 | 135 | 140 | 145 | 150 | 155 | 160 | 165 | 170 | 175 | 180 | 185 | 190 | 195 | 200 | 205 | 210 | 215 | 220 | 225 | 230 | 235 | 240 | 245 | 250 |