

KANSAS HIGHWAY SYSTEM

District 6

2015 Roughness

Right Wheel Path IRI


M / KM

IN / MI


| | | | |
|-------------|--|-----------|---------------|
| < 1.20 | | < 76 | } Level One |
| 1.20 - 1.66 | | 76 - 105 | |
| 1.67 - 2.05 | | 106 - 130 | } Level Two |
| 2.06 - 2.59 | | 131 - 165 | |
| > 2.59 | | > 165 | — Level Three |

Year of Projects

- 2015 Locations
- 2016 Locations
- 2017 Locations



- 8 Chip Seal
- 9 Mod Slurry Seal
- 12 Overlay 1.5"
- 16 SR 1", OL 2"
- 201 New Const (IFD=3)
- 221 Rout & Crack Seal
- 226 SR 2", Chip
- 301 Overlay 2"
- 347 CM 2", OL 2"
- 348 UBAS-Novachip
- 351 CM .5", OL 1.5"
- 374 SR 2", UBAS
- 375 CM 1.5", OL 1.5"
- 384 SR 2", OL 1.5"
- 385 CM 1", OL 1.5"
- 389 CM 1.5", OL 2"
- 427 CM 1", OL 2"
- 431 SR 1.5", OL 1.5"

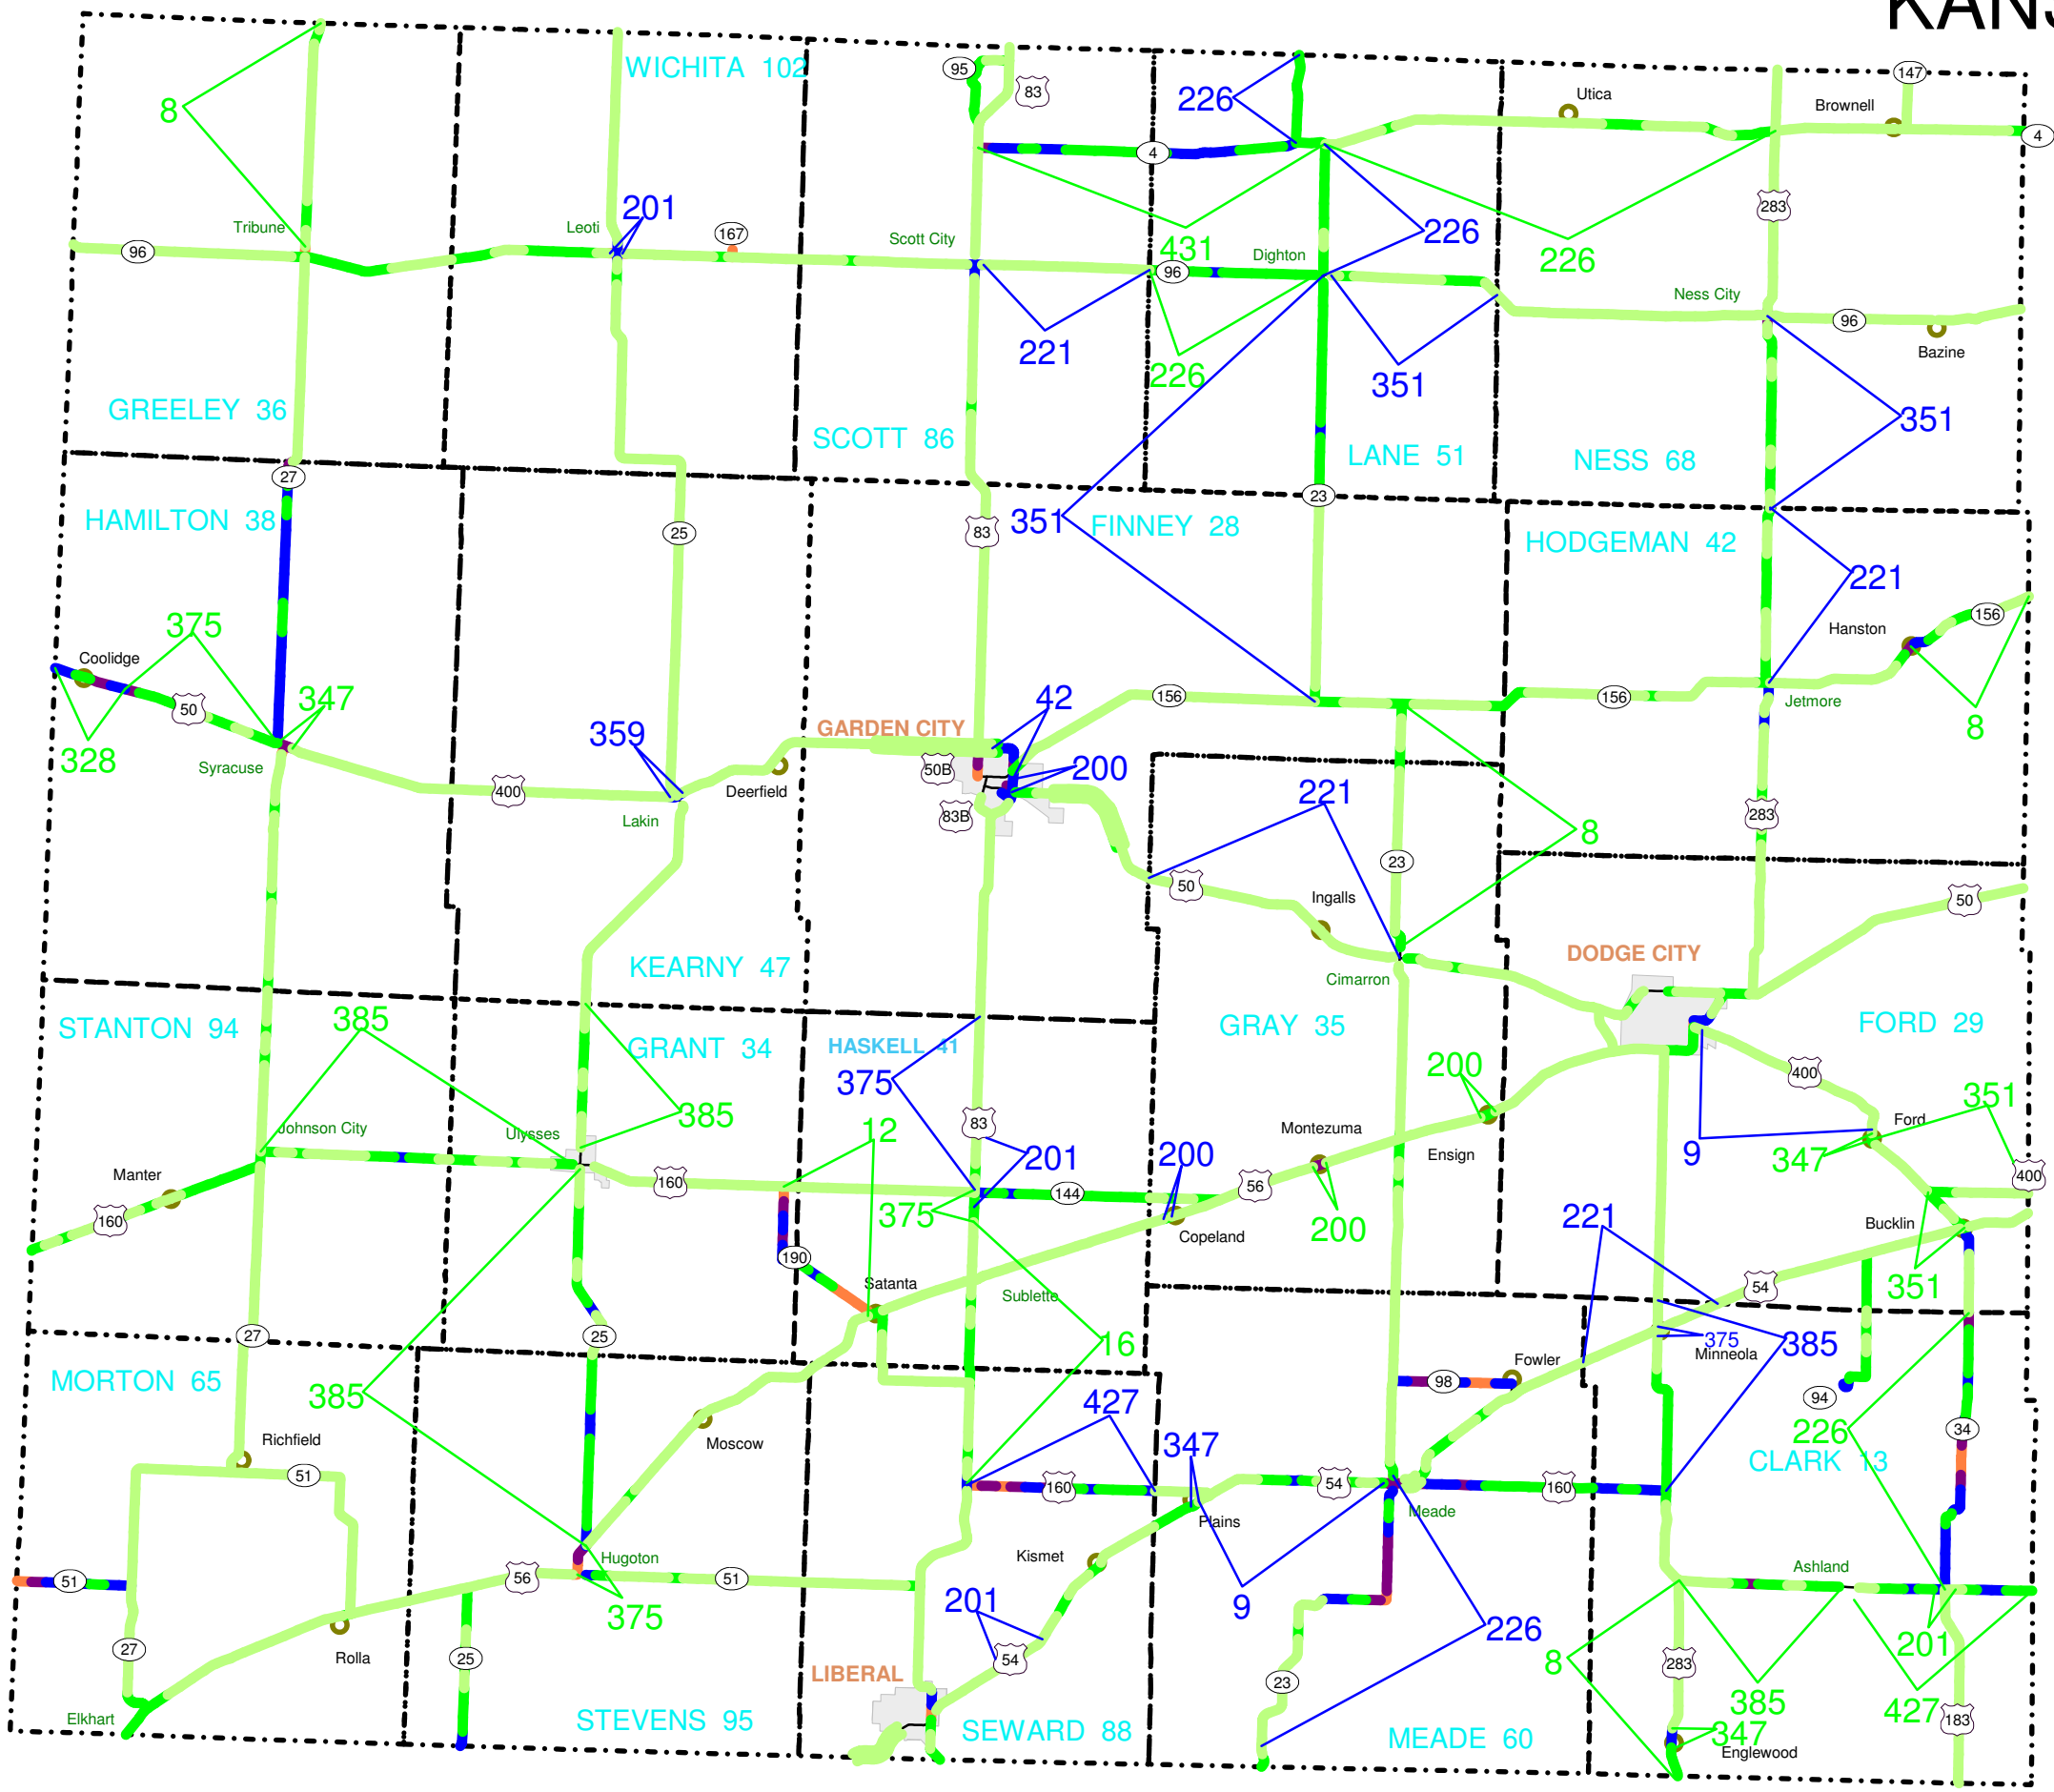

KDOT makes no warranties, guarantees, or representations for accuracy of this information and assumes no liability or responsibility for any errors or omissions.

prepared by
 Kansas Department of Transportation
 Bureau of Construction and Materials
 based on database snapshot from
 August 17, 2015